

1/5

FIG. 1


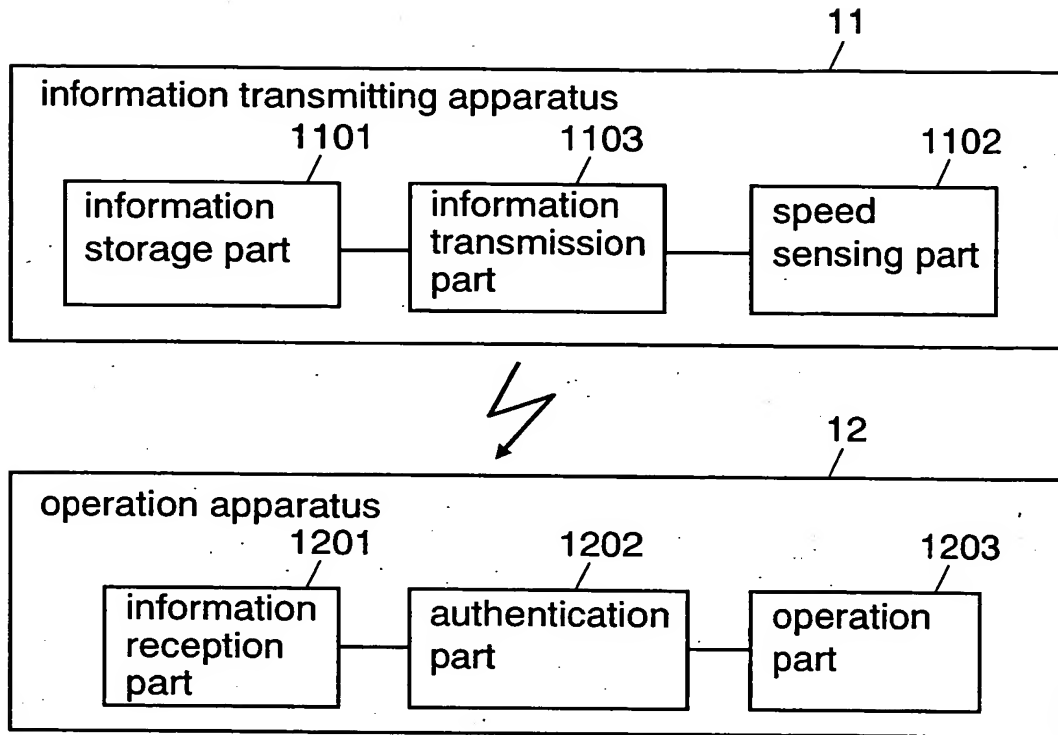


FIG. 2

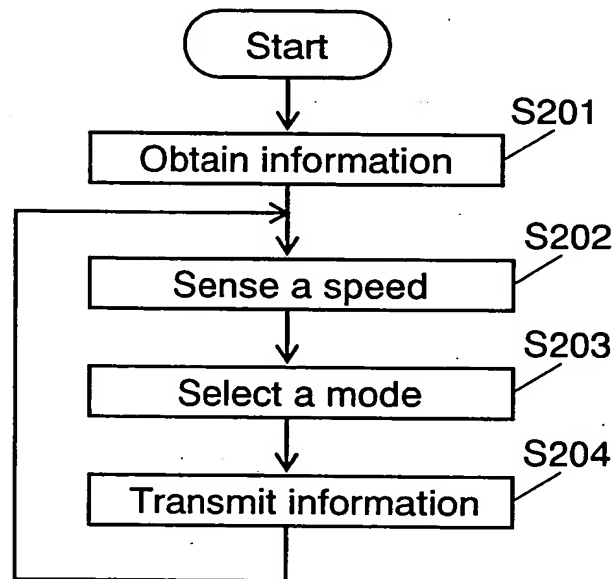

2/5

FIG. 3


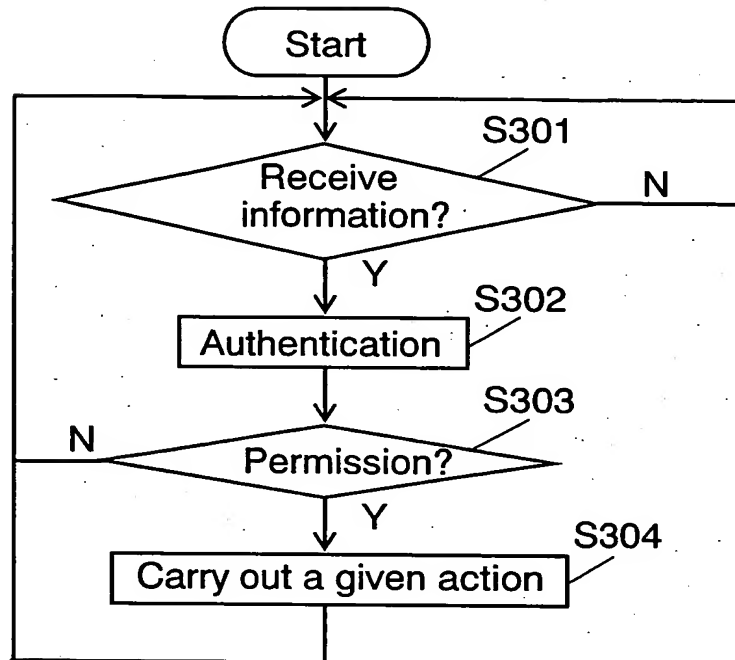


FIG. 4

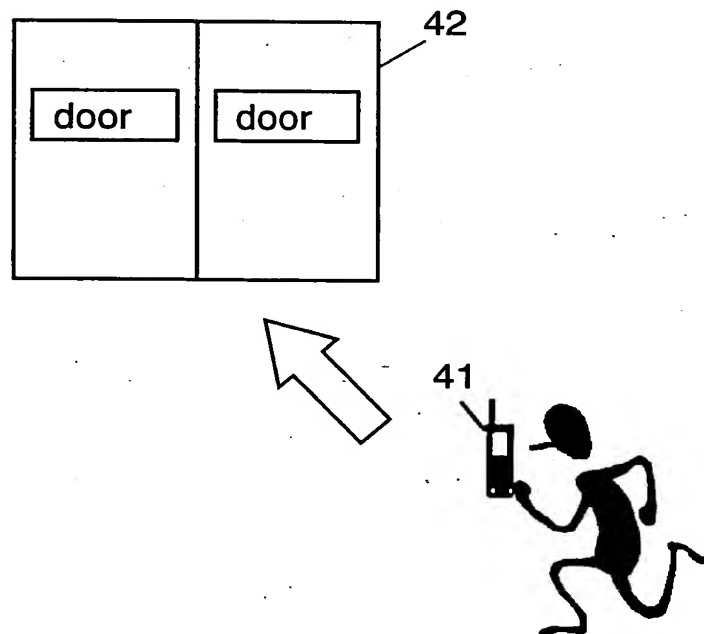

3/5

FIG. 5

| speed (m/sec) | mode | distance |
|---------------|------|----------|
| 0.1~1.0 | 1 | 2m |
| 1.1~3.0 | 2 | 4m |
| >3.0 | 3 | 6m |

FIG. 6

| identifier for identifying an information transmitting apparatus |
|--|
| 1112 |
| 7655 |
| 1234 |
| ⋮ |

FIG. 7

| speed (m/sec) | mode | distance |
|---------------|------|----------|
| 0 | 0 | 1m |
| 0.1~5.0 | 1 | 10m |
| 5.1~15.0 | 2 | 25m |
| >15.0 | 3 | 100m |

4/5

FIG. 8

| speed (m/sec) | mode | distance |
|---------------|------|----------|
| 0 | 0 | 1m |
| 0.1~0.6 | 1 | 2m |
| 0.7~1.3 | 2 | 4m |
| > 1.3 | 3 | 6m |

5/5

List of Reference Marks in the Drawings

- 11, 41 information transmitting apparatus
- 12, 42 operation apparatus
- 1101 information storage part
- 1102 speed sensing part
- 1103 information transmission part
- 1201 information reception part
- 1202 authentication part
- 1203 operation part